

The new CubeX 11 series of Chip PC is a Mini PC with Intel processor of the 11th Gen.


With small form factor and many peripherals Cube 11 is also a silent computer.

CubeX 11 supports quad display via dual HDMI & Mini DP and Type-C.

The CubeX 11 model can be featured with an additional 2.5 SSD.

The CubeX 11 series is a multi-purpose computer for embedded applications, office work and will fulfil your current and future needs.

- Intel Core i5 11th Gen or i7 11th Gen
- Supports 2 USB 2.0 ports & 2 USB 3.0
- Quad Display HDMI x 2 /MINI DP x 1/ Type-C
- Option WIFI & Bluetooth
- Low consumption
- Xcalibur W Management

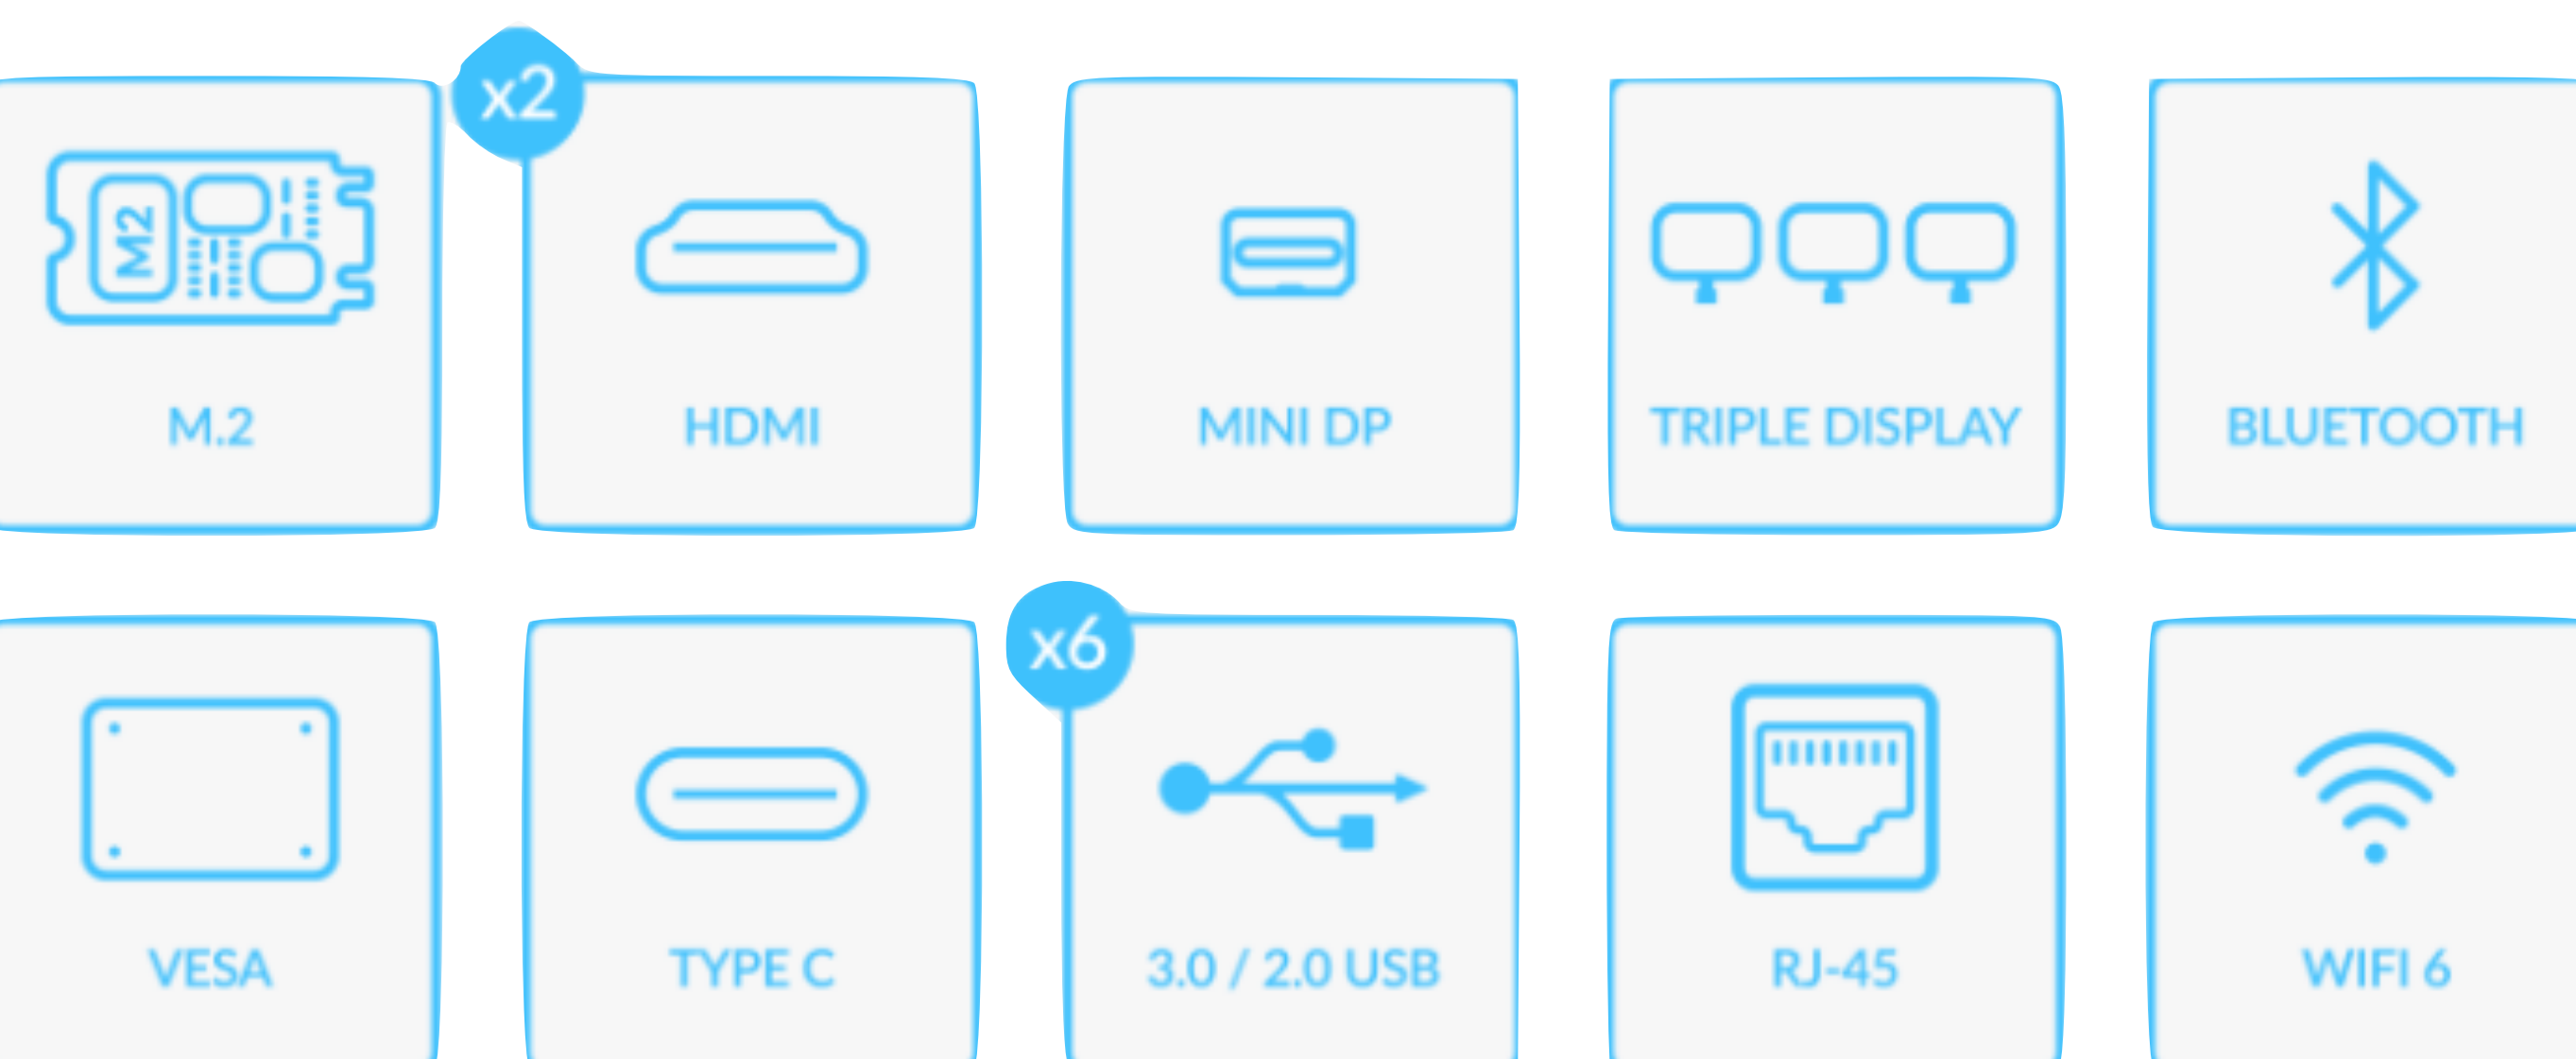



# DataSheet :CubeX 11- Mini PC

<b>Processor</b>	Intel® Core™ i5-1135G7 Processor 8M Cache, up to 4.20 GHz Intel® Core™ i7-1165G7 Processor 12M Cache, up to 4.70 GHz				
<b>OS Support</b>	Windows 11 Pro 64-bit				
<b>Memory</b>	2 x DDR4 SODIMM 8GB to 32GB RAM DDR4L 2666Mhz Dual Storage: SSD Up to 1TB M.2PCIe SSD Up to 1TB 2.5 SATA SDD				
<b>Input / Output ports</b>	<table border="1"> <tr> <td>Front Panel I / O</td> <td>1 x Type-C, support Intel® Thunderbolt™ 4 2 x USB 2.0 1 x 1 x microphone(3.5mm) 1 x headphone(3.5mm) 1 x Power button, power LED</td> </tr> <tr> <td>Rear Panel I / O</td> <td>4 x USB 3.0 2 x HDMI 1 x Mini DP 1 x RJ 45 1 x DC_IN (19V)</td> </tr> </table>	Front Panel I / O	1 x Type-C, support Intel® Thunderbolt™ 4 2 x USB 2.0 1 x 1 x microphone(3.5mm) 1 x headphone(3.5mm) 1 x Power button, power LED	Rear Panel I / O	4 x USB 3.0 2 x HDMI 1 x Mini DP 1 x RJ 45 1 x DC_IN (19V)
Front Panel I / O	1 x Type-C, support Intel® Thunderbolt™ 4 2 x USB 2.0 1 x 1 x microphone(3.5mm) 1 x headphone(3.5mm) 1 x Power button, power LED				
Rear Panel I / O	4 x USB 3.0 2 x HDMI 1 x Mini DP 1 x RJ 45 1 x DC_IN (19V)				
<b>Graphics</b>	Intel® Iris® Xe Graphics				
<b>Resolution</b>	HDMI: Up to 3840*2160 DP : Up to 3840*2160				
<b>Audio</b>	Headphone-out/ MIC-in phone jack				
<b>Network</b>	RJ-45 jack 10/100/1000 Base-T Ethernet WiFi 6 2 x 2 AX Bluetooth® 5.0				
<b>Functions</b>	TPM2.0, PXE, RTC, Wake on LAN, Auto power on				
<b>Environment</b>	Temperature range: Operating - 0°C to 40°C (32°F to 104°F) Storage - 0°C to 60°C (32°F to 140°F) Humidity: Operating - 20 to 80% non condensing; Storage – 10 to 90% non condensing Altitude: 0 to 20,000 ft				
<b>Dimensions</b>	Dimensions : 135*125*51 mm				
<b>Power</b>	Device input: 100~240VAC@50/60HZ Device Output: 12VDC/3.5A external power adapter				
<b>Warranty</b>					

